


## CCNAv7 ITN Skills Assessment- Student Practice

### Topology

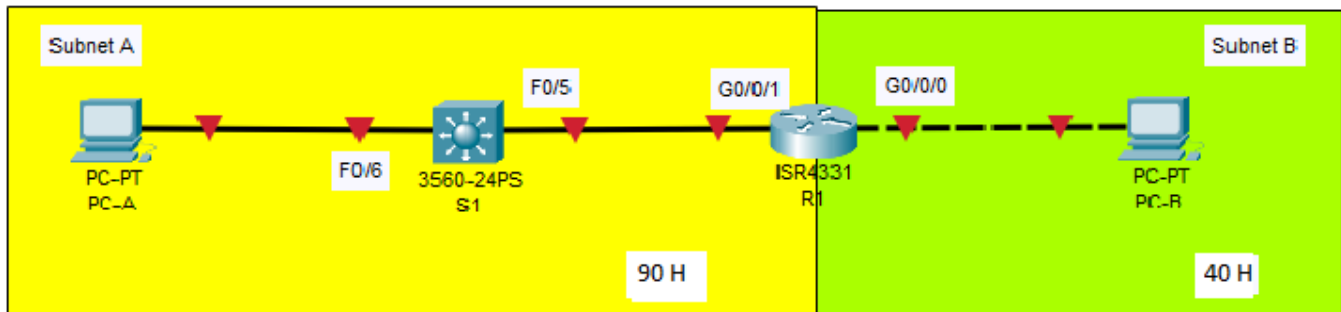

### Assessment Objectives

- Part 1: Develop an IP Addressing Scheme** (20 points, 25 minutes)
- Part 2: Initialize and Reload Devices** (10 points, 20 minutes)
- Part 3: Configure Device IP address and Security Settings** (45 points, 35 minutes)
- Part 4: Test and Verify IPv4 and IPv6 End-to-End Connectivity** (15 points, 20 minutes)
- Part 5: Use the IOS CLI to Gather Device Information** (10 points, 10 minutes)

### Scenario

In this Skills Assessment (SA) you will configure the devices in a small network. You must configure a router, switch and PCs to support both IPv4 and IPv6 connectivity. You will configure security, including SSH, on the router. In addition, you will test and document the network using common CLI commands.

### Required Resources

- 1 Router (Cisco 4221 with Cisco IOS XE Release 16.9.4 universal image or comparable)
- 1 Switch (Cisco 2960 with Cisco IOS Release 15.2(2) lanbasek9 image or comparable)
- 2 PCs (Windows with a terminal emulation program, such as Tera Term)
- Console cables to configure the Cisco IOS devices via the console ports
- Ethernet cables as shown in the topology

### Instructions

#### Part 1: Develop an IP Addressing Scheme

**Total points: 20**

**Time: 25 minutes**

- a. Your instructor will assign one of the IPv4 networks from the table below. You will subnet it to provide IP addresses to two subnets that will support the required number of hosts. No subnet calculators may be used. All work must be shown using the IP Addressing worksheet below.

Network	Number of Hosts in Subnet A	Number of Hosts in Subnet B
192.168.10.0/24	90	40

**IP Addressing Worksheet**

Specification	Subnet A	Subnet B
Number of bits in the subnet		
IP mask (binary)		
New IP mask (decimal)		
Maximum number of usable subnets (including the 0 <sup>th</sup> subnet)		
Number of usable hosts per subnet		
IP Subnet		
First IP Host address		
Last IP Host address		

- b. Record your subnet assignment in the table below.
- Assign the first IPv4 address of each subnet to a router interface
    - subnet A is hosted on R1 G0/0/1
    - subnet B is hosted on R1 G0/0/0
  - Assign the last IPv4 address of each subnet to the PC NIC
  - Assign the second IPv4 address of subnet A to S1
  - List the maximum number of useable hosts per subnet

Description	Subnet A	Subnet B
First IP address		
Last IP address		
Maximum number of hosts		

- c. Record the IP address information for each device:

Device	IP address	Subnet Mask	Gateway	Points
PC-A				2 points
R1-G0/0/1			N/A	2 points
R1-G0/0/0			N/A	2 points

Device	IP address	Subnet Mask	Gateway	Points
S1				2 points
PC-B				2 points

- d. Use the IPv6 address 2001:db8:acad::/48 and create two subnets for use in this network. Record the IPv6 addresses in the table.

Assigned to Interface	IPv6 Subnet Address	Prefix Length

- e. Record the IPv6 address information for each device.

**Note:** Use FE80::1 as the link-local address on both router interfaces.

Device	IPv6 address	Prefix Length	Gateway	Points
R1-G0/0/0			N/A	3 pts
R1-G0/0/1			N/A	3 pts
S1				4 pts

Before proceeding, verify your IP addressing scheme with the instructor.

#### Instructor Sign-off Part 1:

*Instructor Sign-off*

**Total Points for Part 1 (20 points):**

*Enter score here.*

## Part 2: Initialize and Reload Devices

**Total points: 10**

**Time: 20 minutes**

- Erase the startup configurations and VLANs from the router and switch and reload the devices.
- After the switch is reloaded, change the SDM template to one that supports IPv6 as necessary, and reload the switch again.

Before proceeding, ask your instructor verify device initializations.

#### Instructor Sign-off Part 2:

*Instructor Sign-off*

**Total points (10 points):**

*Enter score here.*

## Part 3: Configure Device IP Address and Security Settings

**Total points: 45**

**Time: 35 minutes**

**Step 1: Configure R1.**

Configuration tasks for R1 include the following:

Task	Specification	Points
Disable DNS lookup		1 point
Router name	R1	1 point
Domain name	ccna-lab.com	1 point
Encrypted privileged EXEC password	ciscoenpass	1 point
Console access password	ciscoconpass	1 point
Set the minimum length for passwords	10 characters	2 points
Create an administrative user in the local database	Username: <b>admin</b> Password: <b>admin1pass</b>	2 points
Set login on vty lines to use local database		1 point
Set vty lines to accept SSH connections only		1 point
Encrypt the clear text passwords		1 point
Configure an MOTD Banner		1 point
Enable IPv6 Routing		1 point
Configure Interface G0/0/0	Set the description Set the Layer 3 IPv4 address Set the IPv6 Link Local Address as <b>FE80::1</b> Set the Layer 3 IPv6 address Activate Interface	6 points
Configure Interface G0/0/1	Set the description Set the Layer 3 IPv4 address Set the IPv6 Link Local Address as <b>FE80::1</b> Set the Layer 3 IPv6 address Activate Interface	6 points
Generate an RSA crypto key	1024 bits modulus	2 points

**Step 2: Configure S1.**

Configuration tasks for S1 include the following:

Task	Specification	Points
Disable DNS lookup		1 point
Switch name	S1	1 point
Domain name	ccna-lab.com	1 point
Encrypted privileged EXEC password	ciscoenpass	1 point

Task	Specification	Points
Console access password	ciscoconpass	1 point
Shutdown all unused interfaces	F0/1-4, F0/7-24, G0/1-2	1 point
Create an administrative user in the local database	Username: <b>admin</b> Password: <b>admin1pass</b>	1 point
Set login on vty lines to use local database		1 point
Set vty lines to accept SSH connections only		1 point
Encrypt the clear text passwords		1 point
Configure an MOTD Banner		1 point
Generate an RSA crypto key	1024 bits modulus	2 points
Configure Management Interface (SVI) on VLAN1	Set the description Set the Layer 3 IPv4 address Set the IPv6 Link Local Address as <b>FE80::2</b> Set the Layer 3 IPv6 address	2 points

### Step 3: Configure host computers.

After configuring each host computer, record the host network settings with the **ipconfig /all** command. (2 points)

PC-A Network Configuration (1 point)	
Description	
Physical Address	
IPv4 Address	
Subnet Mask	
IPv4 Default Gateway	
IPv6 Address	
IPv6 Default Gateway	

PC-B Network Configuration (1 point)	
Description	
Physical Address	
IP Address	
Subnet Mask	
Default Gateway	
IPv6 Address	

PC-B Network Configuration (1 point)	
IPv6 Default Gateway	

**Points for Step 1 (28 points):**

*Enter score here.*

**Points for Step 2 (15 points):**

*Enter score here.*

**Points for Step 3 (2 points):**

*Enter score here.*

**Instructor Sign-off Part 4:**

*Instructor Sign-off*

**Total Points for Part 3 (45 points)**

*Enter score here.*

## Part 4: Test and Verify End-to-End Connectivity

**Total points: 15**

**Time: 10 minutes**

Use the ping command to test IPv4 and IPv6 connectivity between all network devices.

**Note:** If pings to host computers fail, temporarily disable the computer firewall and retest.

Use the following table to methodically verify connectivity with each network device. Take corrective action to establish connectivity if a test fails:

From	To	Protocol	IP Address	Ping Results	Points
PC-A	R1 G0/0/0	IPv4			1 point
		IPv6			1 point
	R1 G0/0/1	IPv4			1 point
		IPv6			1 point
	S1 VLAN 1	IPv4			1 point
		IPv6			1 point
	PC-B	IPv4			1 point
		IPv6			1 point
PC-B	R1 G0/0/0	IPv4			1 point
		IPv6			1 point
	R1 G0/0/1	IPv4			1 point
		IPv6			1 point
	S1 VLAN1	IPv4			1 point
		IPv6			1 point

In addition to the ping command, what other command is useful in displaying network delay and breaks in the path to the destination? (1 point)

*Type your answers here.*

**tracert or traceroute**

**Instructor Sign-off Part 4:**

*Instructor Sign-off*

**Total points for Part 4 (15 points):**

*Enter score here.*

## Part 5: Use the IOS CLI to Gather Device Information

**Total points: 10**

**Time: 10 minutes**

**Step 1: Issue the appropriate command to discover the following information:**

Description		Points
Router Model		1/3 point
IOS Image File		1/3 point
Total RAM		1/3 point
Total Flash Memory		1/3 point
Configuration Register		1/3 point
CLI Command Used		1/3 point

**Step 2: Enter the appropriate CLI command needed to display the following on R1:**

Command Description	Command	Points
Display a summary of important information about the IPv4 interfaces on R1.		1 point
Display the IPv4 routing table.		1 point
Display the Layer 2 to Layer 3 mapping of addresses on R1.		1 point
Display detailed IPv4 information about interface G0/0/0 on R1.		1 point
Display the IPv6 routing table.		1 point
Display a summary of IPv6 interface addresses and status.		1 point
Display information about the devices connected to R1. Information should include Device ID, Local Interface, Hold time, Capability, Platform, and Port ID.		1 point

Command Description	Command	Points
Save the current configuration so it will be used the next time the router is started.		1 point

**Instructor Sign-off Part 5:***Instructor Sign-off***Total points for Part 5 (10 points):***Enter score here.***Part 6: Cleanup**

**NOTE: DO NOT PROCEED WITH CLEANUP UNTIL YOUR INSTRUCTOR HAS GRADED YOUR SKILLS EXAM AND HAS INFORMED YOU THAT YOU MAY BEGIN CLEANUP.**

Unless directed otherwise by the instructor, restore host computer network connectivity, and then turn off power to the host computers.

Before turning off power to the router and switch, remove the NVRAM configuration files (if saved) from both devices.

Disconnect and neatly put away all LAN cables that were used in the Final.

**Router Interface Summary Table**

Router Model	Ethernet Interface #1	Ethernet Interface #2	Serial Interface #1	Serial Interface #2
1800	Fast Ethernet 0/0 (F0/0)	Fast Ethernet 0/1 (F0/1)	Serial 0/0/0 (S0/0/0)	Serial 0/0/1 (S0/0/1)
1900	Gigabit Ethernet 0/0 (G0/0)	Gigabit Ethernet 0/1 (G0/1)	Serial 0/0/0 (S0/0/0)	Serial 0/0/1 (S0/0/1)
2801	Fast Ethernet 0/0 (F0/0)	Fast Ethernet 0/1 (F0/1)	Serial 0/1/0 (S0/1/0)	Serial 0/1/1 (S0/1/1)
2811	Fast Ethernet 0/0 (F0/0)	Fast Ethernet 0/1 (F0/1)	Serial 0/0/0 (S0/0/0)	Serial 0/0/1 (S0/0/1)
2900	Gigabit Ethernet 0/0 (G0/0)	Gigabit Ethernet 0/1 (G0/1)	Serial 0/0/0 (S0/0/0)	Serial 0/0/1 (S0/0/1)
4221	Gigabit Ethernet 0/0/0 (G0/0/0)	Gigabit Ethernet 0/0/1 (G0/0/1)	Serial 0/1/0 (S0/1/0)	Serial 0/1/1 (S0/1/1)
4300	Gigabit Ethernet 0/0/0 (G0/0/0)	Gigabit Ethernet 0/0/1 (G0/0/1)	Serial 0/1/0 (S0/1/0)	Serial 0/1/1 (S0/1/1)

**Note:** To find out how the router is configured, look at the interfaces to identify the type of router and how many interfaces the router has. There is no way to effectively list all the combinations of configurations for each router class. This table includes identifiers for the possible combinations of Ethernet and Serial interfaces in the device. The table does not include any other type of interface, even though a specific router may contain one. An example of this might be an ISDN BRI interface. The string in parenthesis is the legal abbreviation that can be used in Cisco IOS commands to represent the interface.